

PULSAFEEDER®

The Pulsatron Series C offers manual online stroke length adjustment with fixed stroke rate. Optional control features include external pace a choice between momentary on/off switch for priming the pump or a toggle on/off switch for manual override of all control functions.

Four distinct models are available, having pressure capabilities of 80 PSIG (5.6 BAR), and flow capacities up to 30 GPD (4.7 lph), with a turndown ratio of 10:1. Metering performance is reproducible to within $\pm 3\%$ of maximum capacity.

Features

- Manual Control by on-line adjustable stroke length (fixed stroke rate).
- Liquid Low Level Option available to prevent loss of prime.
- Highly Reliable timing circuit.
- Circuit Protection against voltage and current upsets.
- Solenoid Protection by thermal overload with auto-reset.
- Water Resistant, for outdoor and indoor applications.
- Internally Dampened To Reduce Noise.
- Guided Ball Check Valve Systems, to reduce back flow and enhance outstanding priming characteristics.
- Few Moving Parts and Wall Mountable.
- Safe & Easy Priming with durable leak-free bleed valve assembly (standard).
- Automatic Control by external pacing with prime switch (optional).

Controls



Manual Stroke Length

- Turn-Down Ratio 5:1

External Pacing-Optional

- Auto/Manual Selection or Prime Button

Operating Benefits

- Reliable metering performance.
- Rated "hot" for continuous duty.
- High viscosity capability.
- Leak-free, sealless, liquid end.



Aftermarket

- KOPkits
- Gauges
- Dampeners
- Pressure Relief Valves
- Tanks
- Pre-Engineered Systems
- Process Controllers (MicroVision)



PULSatron® Series C

Specifications and Model Selection

MODEL		LC02	LC03	LC04	LC54
Capacity nominal (max.)	GPH	0.25	0.50	1.00	1.25
	GPD	6	12	24	30
	LPH	0.9	1.9	3.8	4.7
Pressure (max.)	PSIG	80	80	80	80
	BAR	5.6	5.6	5.6	5.6
Connections:	Tubing	1/4" ID X 3/8" OD 3/8" ID X 1/2" OD			
	Piping	1/4" FNPT			

Engineering Data

Pump Head Materials Available: GFPPPL
PVC
PVDF
316 SS

Diaphragm: PTFE-faced CSPE-backed

Check Valves Materials Available:

Seats/O-Rings: PTFE
CSPE
Viton

Balls: Ceramic
PTFE
316 SS
Alloy C

Fittings Materials Available:

PVC
PVDF

Bleed Valve: Same as fitting and check valve selected, except 316SS

Injection Valve & Foot Valve Assy: Same as fitting and check valve selected

Tubing: Clear PVC
White PE

Important: Material Code - GFPPPL=Glass-filled Polypropylene, PVC=Polyvinyl Chloride, PE=Polyethylene, PVDF=Polyvinylidene Fluoride, CSPE=Generic formulation of Hypalon, a registered trademark of E.I. DuPont Company. Viton is a registered trademark of E.I. DuPont Company. PVC wetted end recommended for sodium hypochlorite.

Engineering Data

Reproducibility: +/- 3% at maximum capacity

Viscosity Max CPS: 1000 CPS

Stroke Frequency Max SPM: 125

Stroke Length Turn-Down Ratio: 10:1

Power Input: 115 VAC/50-60 HZ/1 ph
230 VAC/50-60 HZ/1 ph

Average Current Draw:

@ 115 VAC; Amps: 0.6 Amps

@ 230 VAC; Amps: 0.3 Amps @ 230 VAC

Peak Input Power: 130 Watts

Average Input Power @ Max SPM: 50 Watts

Custom Engineered Designs – Pre-Engineered Systems




Pre-Engineered Systems

Pulsafeeder's Pre-Engineered Systems are designed to provide complete chemical feed solutions for all electronic metering applications. From stand alone simplex pH control applications to full-featured, redundant sodium hypochlorite disinfection metering, these rugged fabricated assemblies offer turn-key simplicity and industrial-grade durability. The UV-stabilized, high-grade HDPE frame offers maximum chemical compatibility and structural rigidity. Each system is factory assembled and hydrostatically tested prior to shipment.

Dimensions

Series C Dimensions (inches)						
Model No.	A	B	C	D	E	Shipping Weight
LC02	5.0	9.6	9.5	6.5	8.2	10
LC03	5.0	9.9	9.5	6.5	8.5	10
LC04	5.0	9.9	9.5	6.5	8.5	10
LC54	5.0	9.9	9.5	6.5	8.5	10

NOTE: Inches X 2.54 = cm

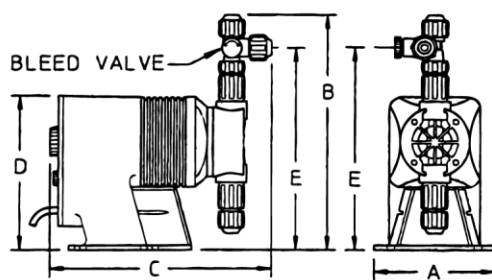

SHARRY Machinery (Shanghai) Co., Ltd
 谐芮机械(上海)有限公司
 Tel : 021- 6488 1886 Fax:021- 5186 2316
 E-Mail : sharry@sharry-sh.com
 Web : www.sharry-sh.com

SHARRY Machinery (Shanghai) Co., Ltd

sharry@sharry-sh.com

www.sharry-sh.com